

# ERF


2 mm thick

Quick installation. Applications for pharmaceutical, universities, locker rooms, arenas and other areas that require a decorative durable finish. Durable, coloured flake epoxy floor system.

## FEATURES:

- Decorative stain resistant surface
- Attractive floor surface with unlimited colour options
- Seamless overlayment with epoxy sealer

## FLOOR SYSTEM LAYERS:

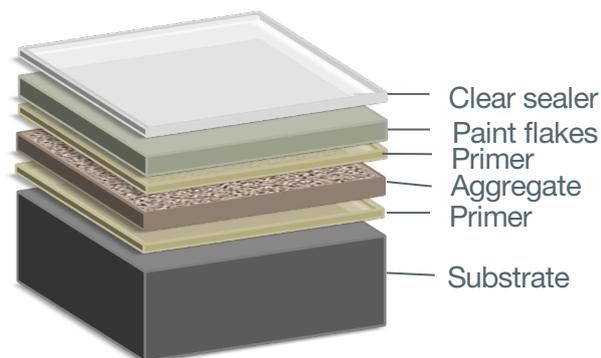

# TECHNICAL PROFILE

## COMPONENTS

Three component primer and aggregate, three component undercoat, brightly coloured flakes, and sealant.

### CURE RATE AT 25°C

12 Hours for foot traffic and 24 hours for normal operation

### OTHER

Tensile Strength	11 MPa
Flexural Strength	30 MPa
Hardness	85 to 90
Impact Resistance	> 18 Nm
Abrasion Resistance	0.03 g
Coefficient of friction	0.79 (dry)
Slip resistance index	0.85 (wet)
Flammability	Class I
VOC Content	ERF undercoat: 50 g/l Sealer: 34 g/l

\*Typical properties at 25°C

For a full Technical profile, please contact [info@nuvo.co.za](mailto:info@nuvo.co.za).

