

LPT

2-4 mm thick


Ideally suited for commercial and front of house applications where a smooth, decorative, coloured quartz finish is desirable. Also suited for vivariums and research labs.

LPT or Light Power Troweled is a complicated system with three phase application. Phases 4 and 5 are included as a sacrificial layer and maintenance coat.

FEATURES:

- Cost-effective alternative to terrazzo
- Combined decorative and functional finish
- Chemical and stain resistance
- Wear resistance
- Slip resistance

FLOOR SYSTEM LAYERS:

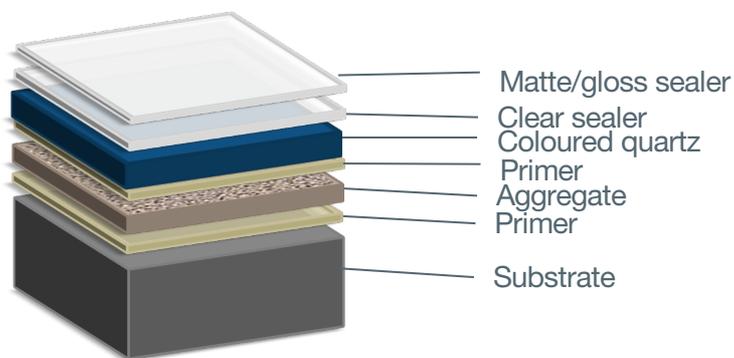

TECHNICAL PROFILE

COMPONENTS

Coloured quartz granules bonded by an epoxy resin system.

CURE RATE AT 25°C

12 Hours for foot traffic and 24 hours for normal operation

OTHER

Compressive Strength	41.4 MPa
Tensile Strength	10 MPa
Flexural Strength	15 MPa
Hardness	85 to 90
Impact Resistance	18 Nm
Abrasion Resistance	0.06 mg
Slip Index	0.85
Flammability	Class I
VOC Content	18 g/l

*Typical properties at 25°C

For a full Technical profile, please contact info@nuvo.co.za.



Blue Topaz



Russet



Willow



Shale



Topiary



Iris



Crushed Slate



Sandstone




Sierra



Clay



Wolf Gray



Macchiato



Meadow




Autumn



Black Sapphire



Stone



Cork



Tea Leaf



Luna