

723

1 mm thick


Used where high build, 100% solids and chemical resistance is required and is suitable for show rooms.

723 is a high gloss smooth epoxy screed applied with a notched rake.

FEATURES:

- Coloured
- High build epoxy coating
- Dense and protective
- Abrasion and corrosion resistance
- Durable, high gloss finish
- Good stain resistance and easy cleaning

FLOOR SYSTEM LAYERS:

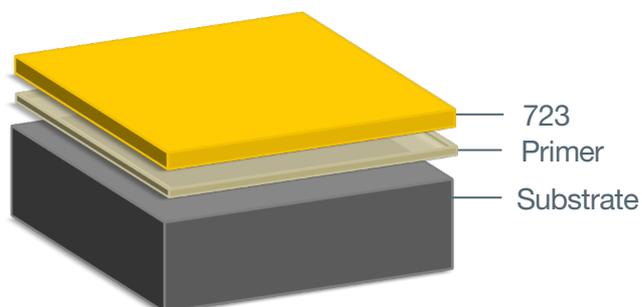

TECHNICAL PROFILE

COMPONENTS

Two component, 100% solids, high build protective epoxy floor coating.

COLOUR

Refer to Stonkote colour chart

CURE RATE AT 25°C

8 Hours for tack-free surface and 24 hours for normal operation

HEAT RESISTANCE LIMITATION

Continuous: 60°C

Intermittent: 93°C

OTHER

Percent solids	100%
Flame spread	Self-extinguishing
VOC Content	27 g/l

*Typical properties at 25°C

For a full Technical profile, please contact info@nuvo.co.za.